




NCS S 0502-Y



DOOR, WINDOW, LIST AND MOLDING PAINTS

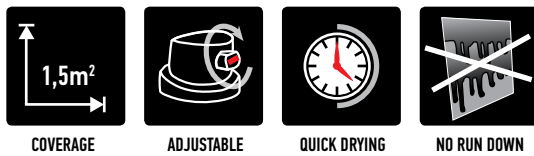


COVERAGE

ADJUSTABLE

QUICK DRYING

NO RUN DOWN

MATERIAL

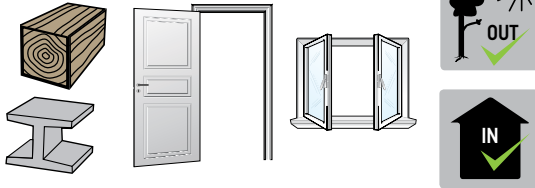

High quality, fast-drying acrylic paint for indoor and outdoor use. Unique compound of high filling acrylic primer and overcoat. Very high coverage and excellent filling power. Thanks to its fast drying characteristics becomes touch-dry in 10 – 20 minutes and cautious re-assembly of the painted objects can be started. Versatile in use, for wood, hard plastic, metal, stone, glass and concrete. Color white, according to NCS standard S 0502-Y, which is used as white in door and window industry, semi-gloss satin finish.

BINDER:
Acrylic, Solvent based

DEGREE OF GLOSS (DIN 67530 60 °):
semi gloss 35-50 gloss units

STORAGE STABILITY: 60 months

EU VOC-CONTENT: VOC 615,21 g/L

RECOAT: always, 5 minutes in between layers

SIZE: 400 ml

SALES QTY: 6 pcs

HARDNESS



ART NR 1801006

BAR CODE 6412490017842



DANGER

Information valid at 20°C, relative air humidity 20% - 70%

Maston Oy • www.maston.fi • maston@maston.fi

Teollisuustie 10, FI-02880 Veikkola, Finland, Tel. +358 20 7188 580, Fax +358 20 7188 599

Teollisuustie 10, 02880 Вейккола, Финляндия, Тел. +358 20 7188 580, Факс. +358 20 7188 599