


MASTON

HEAT RESISTANT SPRAY 250°C & 400°C

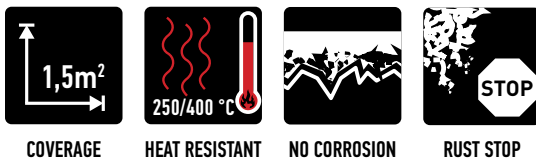


COVERAGE

HEAT RESISTANT

NO CORROSION

RUST STOP

MATERIAL

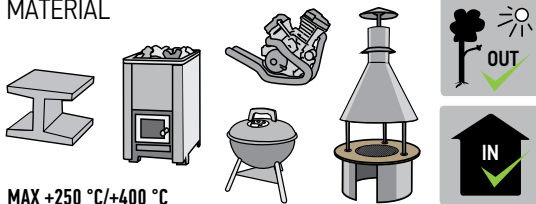

MAX +250 °C/+400 °C

Air-drying **MASTON HEAT RESISTANT SPRAY** is an easy-to-use aerosol paint with a heat-resistance in the range of +250/+400°C. Great for exhaust pipes, motorcycle cylinders, fireplace doors, sauna heaters, outdoor grills and chimneys, the operation temperature of which does not exceed the temperature limit of the product. The best application temperature is is +20 °C.

BINDER:

Silicone resin, Solvent based

DEGREE OF GLOSS (DIN 67530 60 °):

matt 0-25 gloss units

HEAT RESISTANCE: 250 °C / 400 °C**STORAGE STABILITY:** 60 months**EU VOC-CONTENT:** VOC 629 g/L**RECOAT:** in 15 minutes or after 24 hours**SIZE:** 400 ml**SALES QTY:** 6 pcs

HARDNESS

**EU LANGUAGES:** EN, DE, CZ, ES, FR, HU, IT, NL, PL, PT, RO, SK**OTHER:** EN, FI, SE, BG, DK, EE, GR, LT, LV, NO, RU, TR**SPRAYPAINT HEAT RESISTANT +250°C RED 400ML**

ART NR 400805-EU BAR CODE 6412490035372

ART NR 400805 BAR CODE 6412494008051



COLOR

SPRAYPAINT HEAT RESISTANT +400°C BLACK 400ML

ART NR 400121 BAR CODE 6412494001212



COLOR

**DANGER**

Information valid at 20°C, relative air humidity 20% - 70%