





ZINC SPRAY

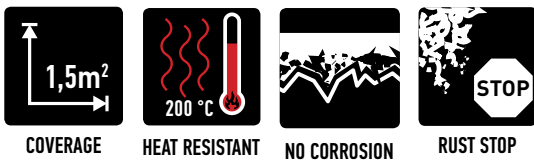

MATERIAL

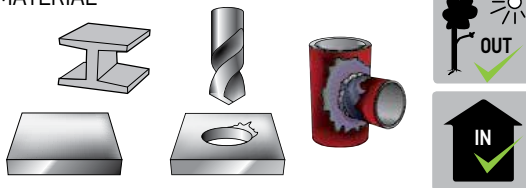

HARDNESS



Zinc sprays are quick-drying, durable anti-corrosive agents for any metal, particularly for protecting welded seams, drilled holes and other areas from metal corrosion. Suitable for any metal repair, for instance fixing damaged zinc surfaces, covering drilled and welded areas or any anti-corrosive applications. Not to be overpainted with alkyd paints. Available in two versions; dark grey zinc for cold galvanized metals and alu-zinc for electric galvanized metals.

ATTENTION! High viscosity. To avoid valve blocking the can must be shaken at least one minute after the shaking balls inside the can become audible. Clean after use by turning the can upside down and spray until only propellant comes out.

BINDER:
Zinc, Solvent based

DEGREE OF GLOSS (DIN 67530 60 °):
matt 0-25 gloss units

HEAT RESISTANCE: +200 °C
STORAGE STABILITY: 60 months

EU VOC-CONTENT:
VOC 626,07 g/L

RECOAT: always

SIZE: 400 ml

SALES QTY:
6 pcs

EU LANGUAGES: EN, DE, CZ, ES, FR, HU, IT, NL, PL, PT, RO, SK
OTHER: EN, FI, SE, BG, DK, EE, GR, LT, LV, NO, RU, TR

SPRAY ZINC 400ML

ART NR 400171-EU BAR CODE 6412490036027

ART NR 400171 BAR CODE 6412494001717



COLOR

SPRAY ALUMINIUM ZINC 400ML

ART NR 400172-EU BAR CODE 6412490034238

ART NR 400172 BAR CODE 6412494001724



COLOR



Information valid at 20°C, relative air humidity 20% - 70%