




ACRYLIC LACQUER

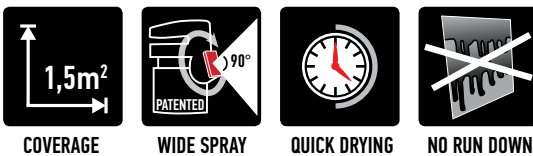


COVERAGE

WIDE SPRAY

QUICK DRYING

NO RUN DOWN

MATERIAL

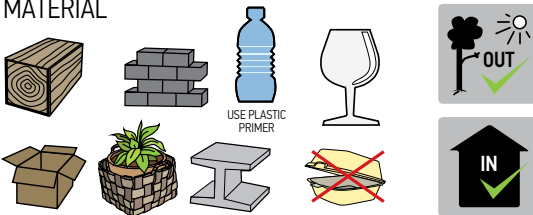

HARDNESS



GLOSSY LACQUER ACRYL provides a non-fading, weatherproof protective layer to various acrylic or alkyd paint covered surfaces. Thanks to its great adhesion the Lacquer Acryl could be applied directly to zinc-coated and aluminium surfaces without any separate priming. The lacquer provides treated surfaces with an efficient protection against oxidation. In between applying the coats of lacquer allow a few minutes for drying. Dust-dry in 15 minutes, touch-dry in 2 hours, and completely dry in 4 hours. Please note that varnishing alkyd based surfaces must be performed wet-on-wet.

BINDER:
Acrylic, Solvent based

DEGREE OF GLOSS (DIN 67530 60 °):
gloss 80-100 gloss units

HEAT RESISTANCE: 120 °C
STORAGE STABILITY: 60 months

EU VOC-CONTENT: VOC 649 g/L

RECOAT: always, 5 minutes in between layers

SIZE: 400 ml

SALES QTY: 6 pcs



SPRAY VARNISH ACRYL 400ML

ART NR 400332

BAR CODE 6412494003322



COLOR



DANGER

Information valid at 20°C, relative air humidity 20% - 70%

Maston Oy • www.maston.fi • maston@maston.fi

Teollisuustie 10, FI-02880 Veikkola, Finland, Tel. +358 20 7188 580, Fax +358 20 7188 599

Teollisuustie 10, 02880 Вейккола, Финляндия, Тел. +358 20 7188 580, Факс. +358 20 7188 599