




## MARK MARKING PAINT



### HARDNESS

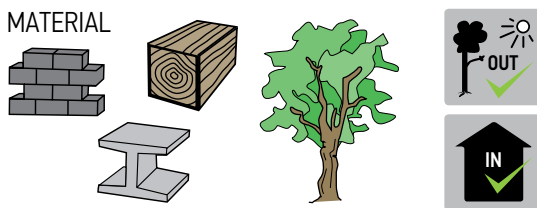

**MARK** is a quick-drying marking paint especially for wood marking but also suitable for stone and metal. The paint is not absorbed in the marked surface.

Unique compounds prevent over-heating of saw blades or paint distribution in processing of wood into boards. Removable with acetone if necessary. Dust-dry in ca 20 seconds. Temperature of the marked surface -35°C – 160°C. The color stays on the surface for about 36 months. Environmentally friendly ink based formulation.

**BINDER:**  
Ink, Solvent based

**DEGREE OF GLOSS (DIN 67530 60 °):**  
matt 0-25 gloss units

**HEAT RESISTANCE:** -35°C - +160°C  
**STORAGE STABILITY:** 60 months

**EU VOC-CONTENT:** VOC 612,2 g/L

**RECOAT:** not necessary

**SIZE:** 500 ml



**SALES QTY:** 6 pcs

Information valid at 20°C, relative air humidity 20% - 70%

# Mark markingpaint - EU

## 500 ml

**MASTON****EU LANGUAGES:** EN, DE, CZ, ES, FR, HU, IT, NL, PL, PT, RO, SK

Art Nr	Markingspray MARK 500ml - EU	Color	Barcode
401002-EU	Markingspray MARK Green 500ml		6412490035914
401005-EU	Markingspray MARK Red 500ml		6412490035921

# Mark markingpaint

## 500 ml

**OTHER:** EN, FI, SE, BG, DK, EE, GR, LT, LV, NO, RU, TR

Art Nr	Markingspray MARK 500ml	Color	Barcode
401001	Markingspray Mark yellow 500ml		6412494010016
401002	Markingspray Mark green 500ml		6412494010023
401003	Markingspray Mark blue 500ml		6412494010030
401005	Markingspray Mark red 500ml		6412494010054
401007	Markingspray Mark black 500ml		6412494010078
401008	Markingspray Mark white 500ml		6412494010085