



UNDERBODY COATING BRUSHABLE

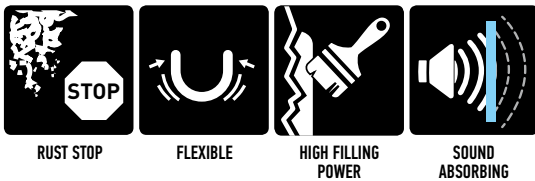

MASTON UNDERBODY COATING is a quick-drying bitumen-based protector for your car's chassis. It is flexible, hard-wearing, and provides excellent protection against rust. Instructions: Clean the surface carefully. Cover all surfaces that do not require treatment. Recommended operating temperature +20 °C. Apply a 2-3 mm thick layer with a brush or spatula. Drying time: 4-5 hours (20 °C). Thinning / cleaner: Maston Thinner.

MATERIAL

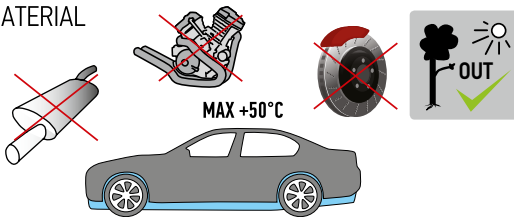

BINDER:
Bitumen, Solvent based

VOC:
II A i VOC/LOÜ/ЛОВ-/ЛОJ max. 500g/l (2010), VOC 270,68 g/l

STORAGE STABILITY: 60 months

SIZE: 1kg

SALES QTY: 6 pcs

HARDNESS

Hardness | Твърдост | Tvrdost | Härte | Hårdhet | Kõvadus | Durezza | Kovuus | Solidité | Σκληρότητα | Keménység | Durezza | Tvrtumas | Cietība | Hardheid | Hardhet | Twardość | Durezza | Duritate | Твердость | Hårdhet | Tvrdost | Sertlik



UNDERBODY COATING AUTO 1KG (BRUSHABLE)

ART NR 4150150 BAR CODE 6412490000141

Information valid at 20°C, relative air humidity 20% - 70%



UNDERBODY COATING



COVERAGE



RUST STOP

FLEXIBLE

HIGH FILLING POWER

MATERIAL

MAX +80 °C



HARDNESS



MASTON UNDERBODY COATING is a quick-drying bitumen-based protector for your car's chassis. It is flexible, hard-wearing, and provides excellent protection against rust.

Instructions: Clean the surface carefully, it should be clean, dry and free of grease. Cover all surfaces that do not require treatment. Shake the container for approx. 3 minutes before use. Working pressure: bar 4-5. Spray from a distance of approx. 30 cm. Spray several thin layers, letting the paste dry in between sprayings. This will give an even and protective result. About 30 minutes in between the layers. Shake the container during the process to keep the paste liquid and spreadable.

Coverage 2m². Drying time at +20 °C: Dry to touch after 75 minutes, completely dry after 3,5 hours. Stain removal we recommend Maston Thinner.

BINDER:

Bitumen, Solvent based

STORAGE STABILITY: 60 months

EU VOC-CONTENT: VOC 571 g/l

SIZE: 1l

SALES QTY: 12 pcs

UNDERBODY COATING UBC-11 AUTO 1L (SCREW-TOP JAR)

ART NR 4150110

BAR CODE 6412490000134

Danger



Information valid at 20°C, relative air humidity 20% - 70%

Maston Oy • www.maston.fi • maston@maston.fi

Teollisuustie 10, FI-02880 Veikkola, Finland, Tel. +358 20 7188 580, Fax +358 20 7188 599

Teollisuustie 10, 02880 Вейккола, Финляндия, Тел. +358 20 7188 580, Факс. +358 20 7188 599