




STONECHIP COATING SPRAY



MASTON STONECHIP SPRAY provides effective protection for car parts that are susceptible to stone chipping. Thanks to its rubbery consistency, it is an excellent protector against chipping and rusting. It also has a soundproofing effect. Maston Stonechip can be painted over with most car paints.

MATERIAL

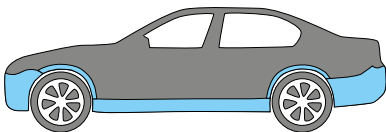

Instructions: Carefully clean the painted surface you wish to treat. Cover all surfaces that do not require treatment. Shake the container for approx. 3 minutes before use. Spray from a distance of approx. 30 cm. Spray several thin layers, letting the paste dry in between sprayings. This will give an even and protective result. Shake the container during the process to keep the paste liquid and spreadable. Clean nozzle after use: turn container upside down and press the atomizer until only propellant gas / air comes out. For stain removal we recommend Maston Thinner. Drying time at +20 °C: touch-dry in approx. 30-60 min., ready for repainting in 1-2 h. Repainting: Before repainting, ensure that the paste is completely dry and properly adhered to the treated surface.

HARDNESS



BINDER:
Rubber, Solvent based



STORAGE STABILITY: 60 months

EU VOC-CONTENT: VOC 547,77 g/l

SIZE: 500 ml



SALES QTY: 6 pcs

EU LANGUAGES: EN, DE, CZ, ES, FR, HU, IT, NL, PL, PT, RO, SK
OTHER: EN, FI, SE, BG, DK, EE, GR, LT, LV, NO, RU, TR



SPRAY STONECHIP COATING BLACK 500ML

ART NR 4150501-EU **BAR CODE** 6412490034269

ART NR 4150501 **BAR CODE** 6412490000172



SPRAY STONECHIP COATING GREY 500ML

ART NR 4150502-EU **BAR CODE** 6412490034276

ART NR 4150502 **BAR CODE** 6412490000189



Information valid at 20°C, relative air humidity 20% - 70%