




STONECHIP COATING



COVERAGE
MAX +80 °C

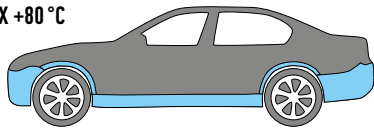

HARDNESS



MASTON STONECHIP COATING is protection agent for your car's door and skirting panels. Also suitable as a protector during storage of machines and metal parts. Penetrates into the smallest gaps, removing moisture and protecting against rust.

Instructions: Cover all surfaces that do not require treatment. Shake the container for approx. 3 minutes before use. Use bar 4-5. Spray several thin layers, letting the paste dry in between sprayings. This will give an even and protective result. About 15 minutes in between the layers. Shake the container during the process to keep the paste liquid and spreadable. Coverage 1,5m².

Drying time at +20 °C: Dry to touch after 45 minutes, completely dry after 2 hours. Topcoat: make sure that the mass is completely dry and stuck the surface. For stain removal we recommend Maston Thinner.

BINDER:
Rubber, Solvent based

STORAGE STABILITY: 60 months


EU VOC-CONTENT: VOC 551 g/l

SIZE: 1l

SALES QTY: 12 pcs

STONECHIP COATING BLACK 1L

ART NR 4150511 BAR CODE 6412490000196



COLOR

STONECHIP COATING GREY 1L

ART NR 4150512 BAR CODE 6412490000202



COLOR



Information valid at 20°C, relative air humidity 20% - 70%