




TRANSPARENT



## STAINING VARNISH




COVERAGE

MATERIAL



HARDNESS

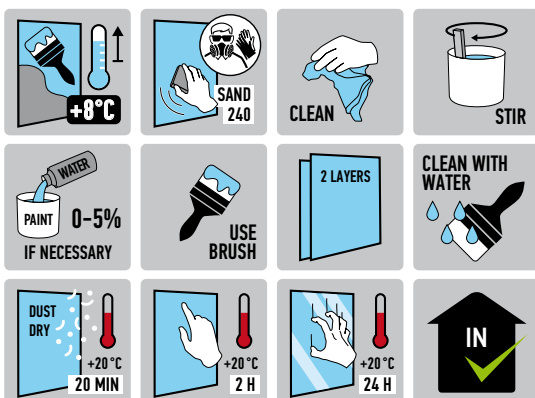

**MASTON WATERBASED STAINING VARNISH** is a transparent and ready-to-use staining varnish for protecting untreated and previously treated surfaces. FOR INDOOR USE ONLY. Gel.

How to do it!

Before use: Sand the surface with abrasive paper. Clean the surface from dust, oil, grease and other impurities.

Working: Before use, stir the lacquer carefully. Apply a thin layer in parallel-to-grain direction. Untreated, as well as, previously treated surfaces must be varnished 2 times if necessary. After first treatment, let the surface dry totally and sand with abrasive paper No. 240. Remove any dust and perform a retreatment. Lowest working temperature: +8°

Dilution and tool cleaning: water (dilute with ca. 5% water if necessary)  
Drying time: (+20°C) dust dry ca. 20 min, touch dry ca. 2 hours, total dry ca. 24 hours.

Coverage: ca. 12m<sup>2</sup>/l.

Protect from freezing.

**BINDER:**

Waterbased

**DEGREE OF GLOSS (DIN 67530 60 °):**

satin 35-50 gloss units

**SIZE:** 250ml

**SALES QTY:** 5 pcs

Information valid at 20°C, relative air humidity 20% - 70%

# Staining varnish 250 ml

**MASTON**

Art Nr	Staining varnish 250ml	Color	Barcode
6021000	Staining varnish 250ml 0 Transparent		6412490003531
6021006	Staining varnish 250ml 6 Mahogany		6412490003555
6021007	Staining varnish 250ml 7 Dark Hazel		6412490003562
6021008	Staining varnish 250ml 8 Light Pine		6412490003579
6021009	Staining varnish 250ml 9 Oak		6412490003586
6021010	Staining varnish 250ml 10 Brown Mahogany		6412490003593
6021011	Staining varnish 250ml 11 Chestnut Brown		6412490003609
6021013	Staining varnish 250ml 13 Palisander		6412490003616
6021016	Staining varnish 250ml 16 White		6412490003623
6021017	Staining varnish 250ml 17 Light Grey		6412490003630
6021018	Staining varnish 250ml 18 Beech		6412490003647