





HEAT RESISTANT PAINT 400°C



COVERAGE




HEAT RESISTANT



MASTON HEAT RESISTANT air-drying paint with a heat resistance of +400 °C is also suited for dampers, bike cylinders, furnace doors, boilers, outdoor grills, chimneys, the operation temperature of which does not exceed +400 °C.

For optimum results: Clean and dry the surface to be treated. Stir the paint carefully before use. Use a brush or a spray for application. If necessary, apply the second layer directly on the wet surface or only after 24 hours of drying at room temperature. For paint dilution and tool cleaning: Maston Xylene.

MATERIAL

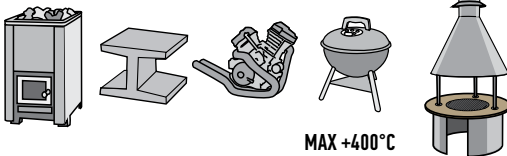

BINDER: Silicone resin, Solvent based

HARDNESS



DEGREE OF GLOSS (DIN 67530 60 °): matt 0-25 gloss units

HEAT RESISTANCE: 400 °C

STORAGE STABILITY: 60 months

EU VOC-CONTENT: VOC 396,17 g/L

RECOAT: in 15 minutes or after 24 hours

SIZE: 250ml, 1L & 10L

SALES QTY:


250ml 5 pcs

1l 2 pcs


10l 1 pcs



CLEAN UP




STIR



5MIN



2 LAYERS IF NECESSARY



+20°C
30MIN



+20°C
24H



CLEAN



SILICONE RESIN

Art nr	Status	Product name	Bar code
604800		Paint Heat-resistant black +400 °C 250ml	6412496048000
604801		Paint Heat-resistant black +400 °C 1l	6412490004668
604811	By order	Paint Heat-resistant black +400 °C 10l	6412490032524
604819		Thinner for Heatresistant 400 °C paint 10l	6412490032579



WARNING

Information valid at 20°C, relative air humidity 20% - 70%