




TEAKOIL LIQUID



MATERIAL



HARDNESS

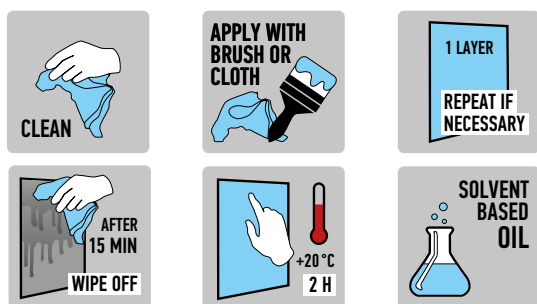

MASTON TEAKOIL is an easy-to-use protecting and caring agent for treating any type of wood. This product cleans and strengthens the timber surface, restoring its natural tone and ensuring resistance to changing climate conditions, and protecting effectively against moisture, dryness, bending and cleaving. The product is suitable for both indoor and outdoor applications. We recommend using protective clothing and goggles. Make sure to protect the surrounding surfaces not to be treated by covering these! For optimum results: The surface must be clean and dry, at temperatures + 15 °C and relatively humidity <80.

Apply a thin layer of oil using a cloth (not napped) directly to a clean and dry surface. Leave to absorb for 15 minutes and remove excess oil using a cloth. In normal circumstances one layer is enough. For new or worn wooden surfaces more layers might be necessary, repeat application if needed.

To avoid self-ignition of cloths, soak used cloths and tools in water after use. Coverage: 8-10 m²/l.

BINDER:
Wood oil, Solvent based

STORAGE STABILITY: 60 months

EU VOC-CONTENT:
Transparent: VOC 341,61 g/L
Brown: VOC 322,7 g/L

RECOAT: after 15 minutes if needed

SIZE: 180ml & 450 ml

SALES QTY:
180 ml 12 pcs
450 ml 6 pcs



TRANSPARENT WARNING



BROWN WARNING

Information valid at 20°C, relative air humidity 20% - 70%

Teak Oil Liquid

180 ml, 450ml & 4l

MASTON**LANGUAGES:** EN, FI, SE

Art Nr	Teak Oil Liquid 180ml	Color	Barcode
605180	Teak Oil Transparent 180ml		6412496051802
605181	Teak Oil Brown 180ml		6412490005634

LANGUAGES: EN, FI, SE, EE,, NO, RU

Art Nr	Teak Oil Liquid 450ml	Color	Barcode
605450	Teak Oil Transparent 450ml		6412496054506
605451	Teak Oil Brown 450ml		6412490005641
Art Nr	Teak Oil Liquid 4l	Color	Barcode
605400	Teak Oil Transparent 4l		6412490032036
605401	Teak Oil Brown 4l		6412490032043