




SPRAY WOOD LACQUER



MATERIAL

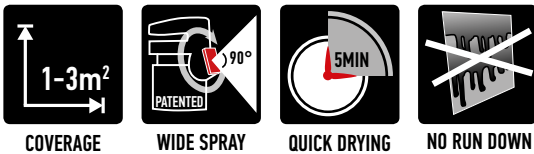

HARDNESS



MASTON WOOD LACQUERS are especially designed for wood application. These alkyd based lacquers are easy and fast to apply, form a flexible, weather proof scratch resistant coat. Extremely clear, non-yellowing formulation works both indoor and outdoor applications. Use these wood finishes for instance to seal and finish interior wood furniture, cabinets, paneling, antiques, stained surfaces and crafts. Available in satin and gloss finish.

BINDER:
Alkyd, Solvent based

DEGREE OF GLOSS (DIN 67530 60 °):
satin 35-50 gloss units
gloss 80-100 gloss units

STORAGE STABILITY: 60 months

EU VOC-CONTENT: VOC 599,29 g/L

RECOAT: 15 minutes or only after 7 days

SIZE: 400 ml

SALES QTY: 6 pcs

EU LANGUAGES: EN, DE, CZ, ES, FR, HU, IT, NL, PL, PT, RO, SK
OTHER: EN, FI, SE, BG, DK, EE, GR, LT, LV, NO, RU, TR

SPRAY WOOD LACQUER 40 SILK GLOSS 400ML

ART NR 6082040-EU **BAR CODE** 6412490036164

ART NR 6082040 **BAR CODE** 6412490024611

SPRAY WOOD LACQUER 90 HIGH GLOSS 400ML

ART NR 6082090-EU **BAR CODE** 6412490036171

ART NR 6082090 **BAR CODE** 6412490024628



DANGER

Information valid at 20°C, relative air humidity 20% - 70%

Maston Oy • www.maston.fi • maston@maston.fi

Teollisuustie 10, FI-02880 Veikkola, Finland, Tel. +358 20 7188 580, Fax +358 20 7188 599

Teollisuustie 10, 02880 Вейккола, Финляндия, Тел. +358 20 7188 580, Факс. +358 20 7188 599