

PLASTIC PUTTY



HIGH FILLING POWER



STRONG BOND




QUICK DRYING



SANDABLE

MASTON PLASTIC PUTTY is white and fine textured putty, which is used as a filler before painting. Plastic putty fills and smoothen cracks and dents on glass fiber structures, metal surfaces, concrete and previously coated surfaces.

MATERIAL

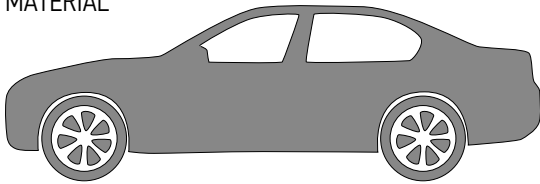

Make sure that the surface is clean and sanded rough for good adhesion. Add 1% of the hardener and mix carefully. Apply the mixture with a steel spatula.

NOTE! The mixture starts to dry in 5 minutes, mix in small batches. After drying polish by using either wet or dry machine sanding. Putty must be kept tightly closed in a cool place. The hardener is severely irritating to the skin and eyes.

HARDNESS



BINDER:

Polyester, Solvent based




DEGREE OF GLOSS (DIN 67530 60 °):

matt 0-25 gloss units

EU VOC-CONTENT: VOC 160 g/L

SIZE: 0,5 kg

SALES QTY: 12 pcs



PLASTIC PUTTY 500 G

ART NR 706105

BAR CODE 6412497061053



DANGER

Information valid at 20°C, relative air humidity 20% - 70%