

GLASS FIBRE PUTTY



HIGH FILLING
POWER



STRONG BOND



QUICK DRYING



SANDABLE


MASTON FIBERGLASS PUTTY

Fiberglass putty is a glass fiber reinforced plastic putty. Putty can be used to repair fiberglass, metal structures and previously coated surfaces, such as filling holes and cracks.

Make sure that the surface is clean and rough and corrosion free for good adhesion and t Add 1% of the hardener and mix carefully. Apply the mixture with a steel spatula.

NOTE! The mixture starts to dry in 5 minutes, mix in small batches. After drying polish by using either wet or dry machine sanding. Putty must be kept tightly closed in a cool place. The hardener is severely irritating to the skin and eyes.

MATERIAL

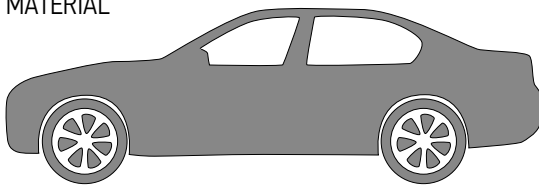

HARDNESS



BINDER:

Polyester, Solvent based




DEGREE OF GLOSS (DIN 67530 60 °):

matt 0-25 gloss units

EU VOC-CONTENT: VOC 160 g/L

SIZE: 0,5 kg

SALES QTY: 12 pcs



GLASS FIBRE PUTTY 500 G

ART NR 706205

BAR CODE 6412497062050



DANGER

Information valid at 20°C, relative air humidity 20% - 70%

Maston Oy • www.maston.fi • maston@maston.fi

Teollisuustie 10, FI-02880 Veikkola, Finland, Tel. +358 20 7188 580, Fax +358 20 7188 599

Teollisuustie 10, 02880 Вейккола, Финляндия, Тел. +358 20 7188 580, Факс. +358 20 7188 599