




**MASTON**

## WOOD STOVE & BBQ PAINT

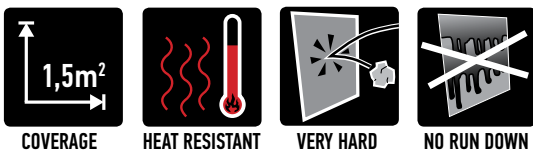

Easy-to-use spray paint for wood stoves, BBQ's, fire places, stoves, chimneys etc. Heat resistant up-to +450°C. Clean the surface of soot and other impurities. Sand with sandpaper 400 if necessary. Best painting temperature +20 °C. Remember to protect the areas outside the object. After painting let the paint dry at least for one hour. Heat the object and take care of necessary ventilation when heated the first time. Grey contains small amount of metallic pigmentation to give the color genuine stove outlook.

**MATERIAL**  
max. 450°C



**BINDER:**  
Silicone resin, Solvent based

**DEGREE OF GLOSS (DIN 67530 60 °):**  
matt 0-25 gloss units

**HARDNESS**



**HEAT RESISTANCE:** 450 °C  
**STORAGE STABILITY:** 60 months

**EU VOC-CONTENT:**  
Black: VOC 629,9 g/L  
Grey: VOC 583,35 g/L

**RECOAT:** always, 15 minutes in between layers

**SIZE:** 400 ml

**SALES QTY:** 6 pcs

**SPRAYPAINT WOOD STOVE & BBQ BLACK 450°C 400ML**

**ART NO** 1801004

**BAR CODE** 6412490017828

**ART NO** 1801004-EU

**BAR CODE** 6412490036058

**COLOR**

**SPRAYPAINT WOOD STOVE & BBQ GREY 450°C 400ML**




**ART NO** 1801040

**BAR CODE** 6412490035341

**ART NO** 1801040-EU

**BAR CODE** 6412490035358

**COLOR RAL 7037**



**DANGER**

Information valid at 20°C, relative air humidity 20% - 70%

**Maston Oy • www.maston.fi • maston@maston.fi**

Teollisuustie 10, FI-02880 Veikkola, Finland, Tel. +358 20 7188 580, Fax +358 20 7188 599

Teollisuustie 10, 02880 Вейккола, Финляндия, Тел. +358 20 7188 580, Факс. +358 20 7188 599